



HALF ELEVATION DOUBLE SWING GATE

NOTES

1. All footings shall be **309kg/M³-C-22-Mpa (520-C-2500)** concrete.
2. The following items shall be furnished and installed only when shown on the plans and/or called for in the special provisions:
 - a. Barbed wire
 - b. Extension post
3. Chain link fence shall conform to Section 206-6 of the Standard Specification for Public Works Construction unless specifically noted on this drawing.

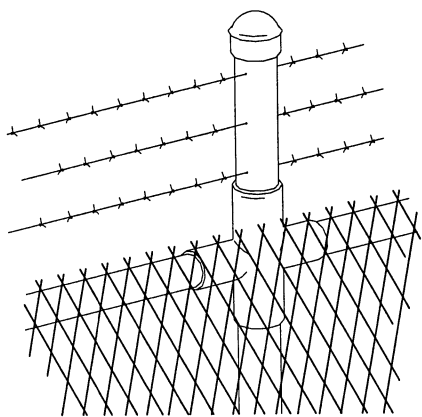

EXTENSION POST AND BARBED WIRE

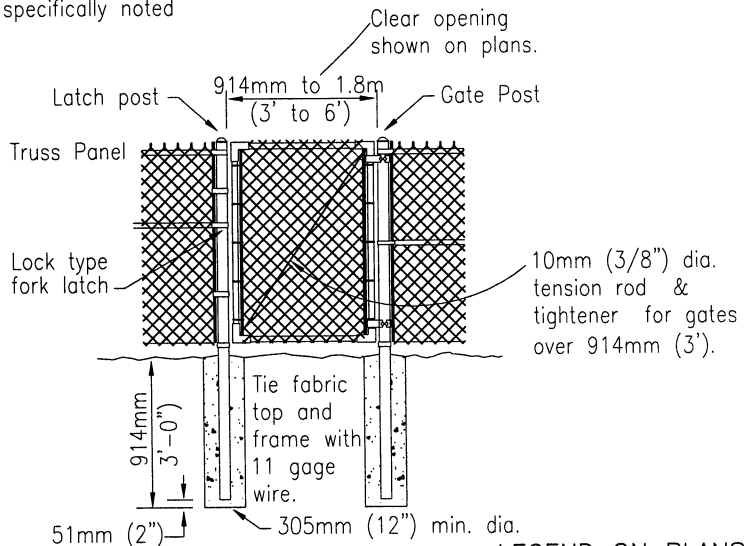

WALK GATE

LEGEND ON PLANS



Revision	By	Approved	Date
ORIGINAL		A.Kercheval	12/75
Add Metric		T. Stanton	03/03

SAN DIEGO REGIONAL STANDARD DRAWING

CHAIN LINK GATE

RECOMMENDED BY THE SAN DIEGO REGIONAL STANDARDS COMMITTEE

T. Stanton 3/10/2003

Chairperson R.C.E. 19246 Date

DRAWING NUMBER M-5