


TYPICAL DEAD END

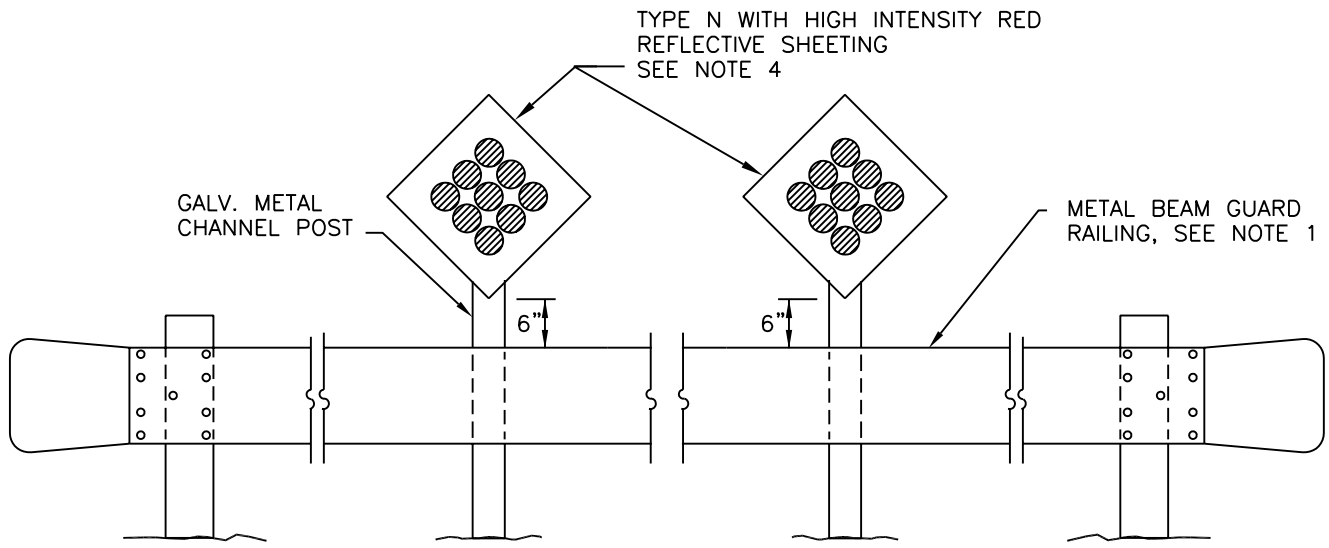

DETAIL A

NOTES:

1. SEE STANDARD PLAN No. 401 FOR METAL BEAM GUARD RAILING DETAILS.
2. LENGTH OF METAL BEAM RAILING SHALL BE IN MULTIPLE OF 12'-6", PLUS 1'-9" FOR EACH END PIECE.
3. THE METAL BEAM GUARD RAILING MAY BE DELETED UNDER SPECIAL CONDITIONS UPON APPROVAL BY THE CITY ENGINEER. THE TYPE N SIGNS OR L(3) MARKERS SHALL BE PLACED AS SHOWN IN DETAILS REGARDLESS OF METAL BEAM GUARD RAILING USED.
4. ONE TYPE N SIGN SHALL BE PLACED IN THE CENTER OF EACH TRAVEL LANE IN A DEAD END SITUATION.

REVISIONS	CITY OF IRVINE	STANDARD PLAN No.
	DEAD END SIGNING	400
	Approved by: Mark L. Carroll R.C.E. 31515 City Engineer	Adopted Date 6-10-92
		Sheet 1 of 1