
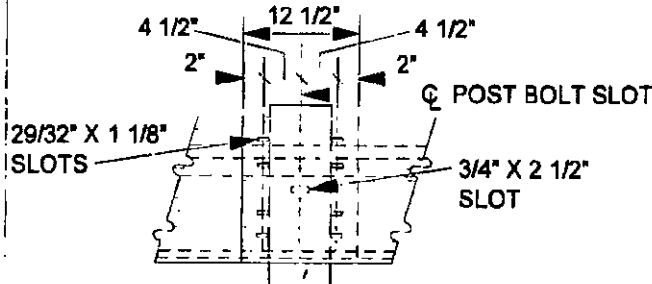


**NOTES:**


1. GUARD RAIL ELEMENT MAY BE EITHER STEEL OR ALUMINUM.
2. STEEL RAIL SHALL BE GALVANIZED PER ASTM DESIGNATION A-123.
3. STEEL RAIL THICKNESS SHALL BE MIN. 12 GAUGE.
4. ALUMINUM RAIL THICKNESS SHALL BE MIN. 0.105 IN..

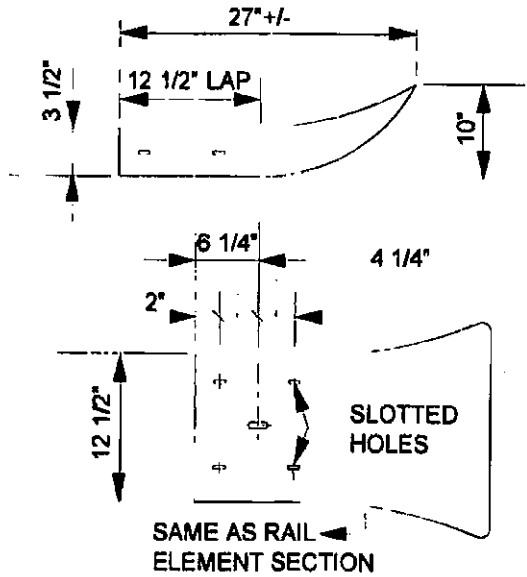

5/8" X 1 1/4" BUTTON HEAD OVAL SHOULDER BOLTS WITH 1 1/4" RECESSED HEX NUTS - TOTAL: 8 PER SPLICE AND 4 PER TERMINAL SECTION.


**RAIL SPLICE**

**TERMINAL SECTION**

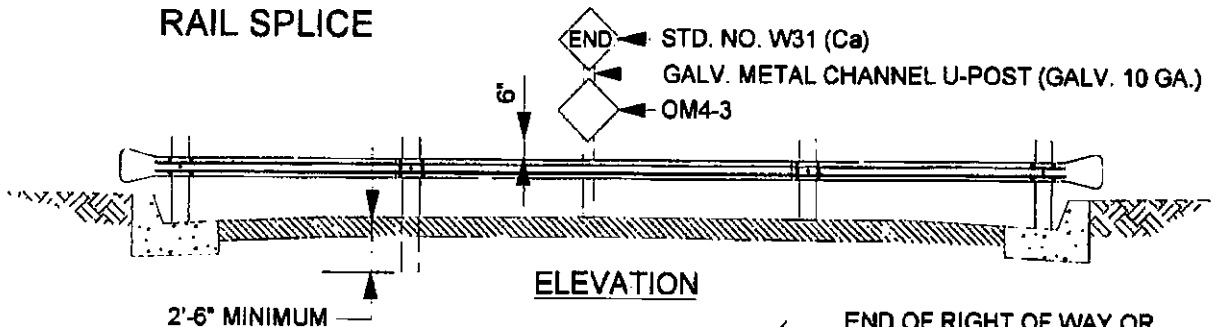

2'-5/8" MINIMUM

END OF RIGHT OF WAY OR BEGINNING OF BUFFER STRIP.

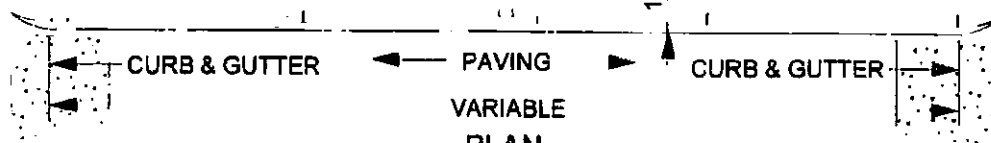


**NOT TO SCALE**

APPROVED BY:

*George A. Johnson*  
 DIRECTOR OF TRANSPORTATION  
 GEORGE A. JOHNSON, RCE 42328

DATE: 05/01/07



COUNTY OF RIVERSIDE

**BARRICADE**

REVISIONS	REV.	BY:	APR'D	DATE	REV.	BY:	APR'D	DATE
8-71, 5-80	1				4			
12-97	2				5			
	3				6			

STANDARD NO. 810